

RODO®


Regular Abutment



Wide Abutment



Accessories

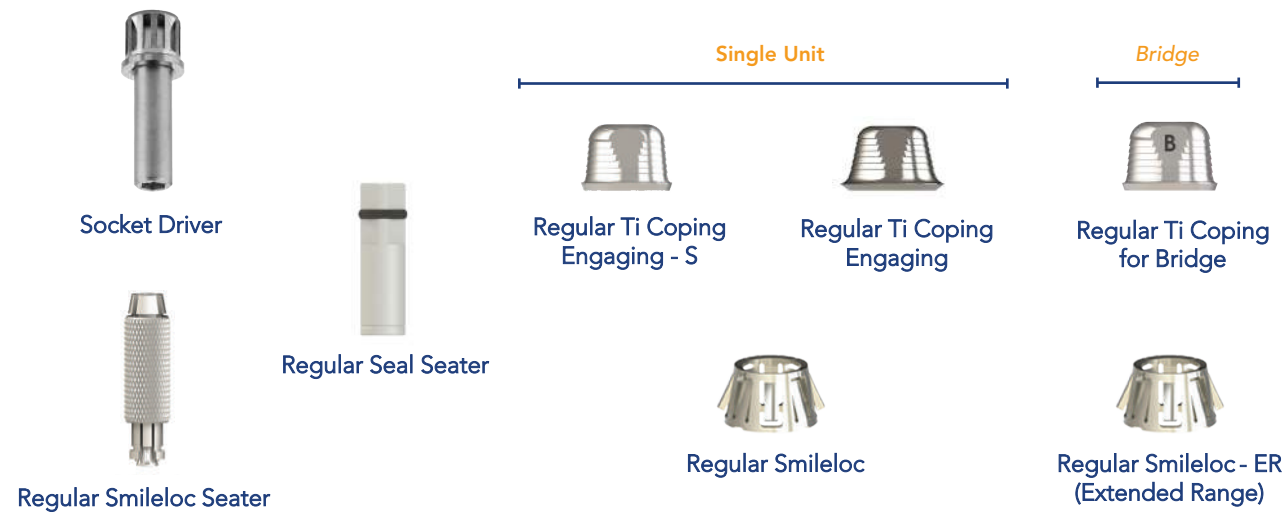


Accessories



Smileloc Seater



Space Requirements

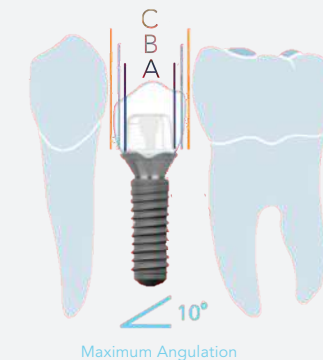

	A Abutment Diameter	B Combined Diameter of Abutment and Coping	C Optimal Interproximal Space
Regular - S	5.5mm	5.9mm	7.9mm
Regular	5.5mm	6.6mm	8.6mm
Wide	6.5mm	7.6mm	9.6mm